

Solution E1 /version 3 (Important: In this document decimal comma is used instead of decimal point in graphs and tables)


1.1

$H = 907 \text{ mm} \pm 2 \text{ mm}$. See the sketch in the figure corresponding to 1.3b. It must appear how the height is measured with the LDM in the rear mode.

1.2a

I used a 2 m cable but 1 m is sufficient. There should be about 8 lengths evenly distributed in the interval [0; 1 m].

| x | y |
|-------|-------|
| m | m |
| 0,103 | 0,177 |
| 0,176 | 0,232 |
| 0,348 | 0,396 |
| 0,546 | 0,517 |
| 0,617 | 0,570 |
| 0,839 | 0,748 |
| 1,025 | 0,885 |
| 1,107 | 0,950 |
| 1,750 | 1,459 |
| 2,000 | 1,642 |

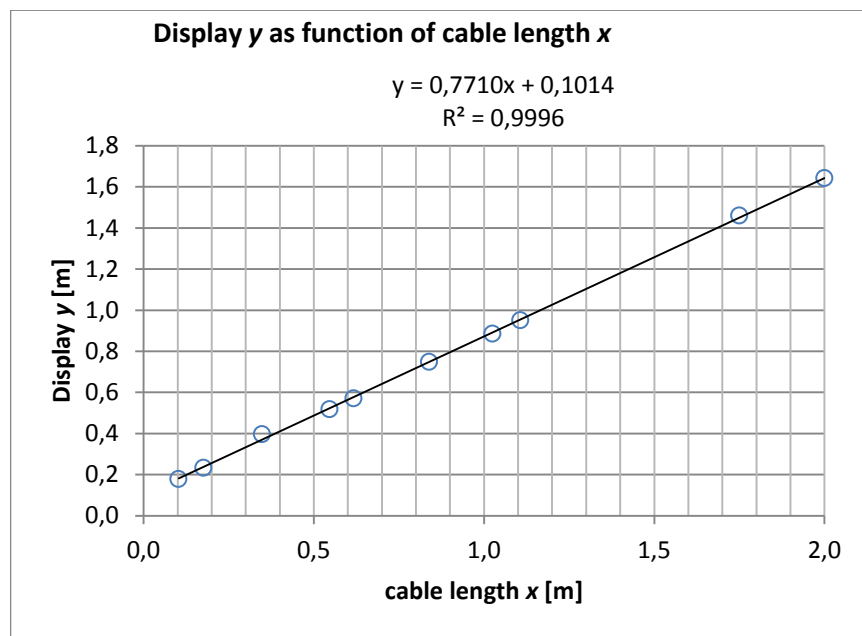

1.2b

The refractive index is twice the gradient of the linear graph, $n_{co} = 2 \cdot 0.7710 = 1.542$.

The reason for that is that the travel time for a light pulse

$$t = \frac{x}{v_{co}} = \frac{xn_{co}}{c}$$

The display will therefore show $y = \frac{1}{2}ct + k \Leftrightarrow y = \frac{1}{2}n_{co}x + k$.


Lysets fart i lyslederkablet er $v_{co} = \frac{c}{n_{co}} = \frac{3,00 \cdot 10^8 \frac{\text{m}}{\text{s}}}{1,542} = 1,95 \cdot 10^8 \frac{\text{m}}{\text{s}}$

1.3a

$$y_1 = 312 \text{ mm} \pm 2 \text{ mm}, y_2 = 1273 \text{ mm} \pm 2 \text{ mm}$$

1.3b

$$\theta_1 = \cos^{-1}\left(\frac{H}{y_2 - y_1}\right) = \cos^{-1}\left(\frac{907 \text{ mm}}{961 \text{ mm}}\right) = 19.30^\circ, \text{ se figure:}$$

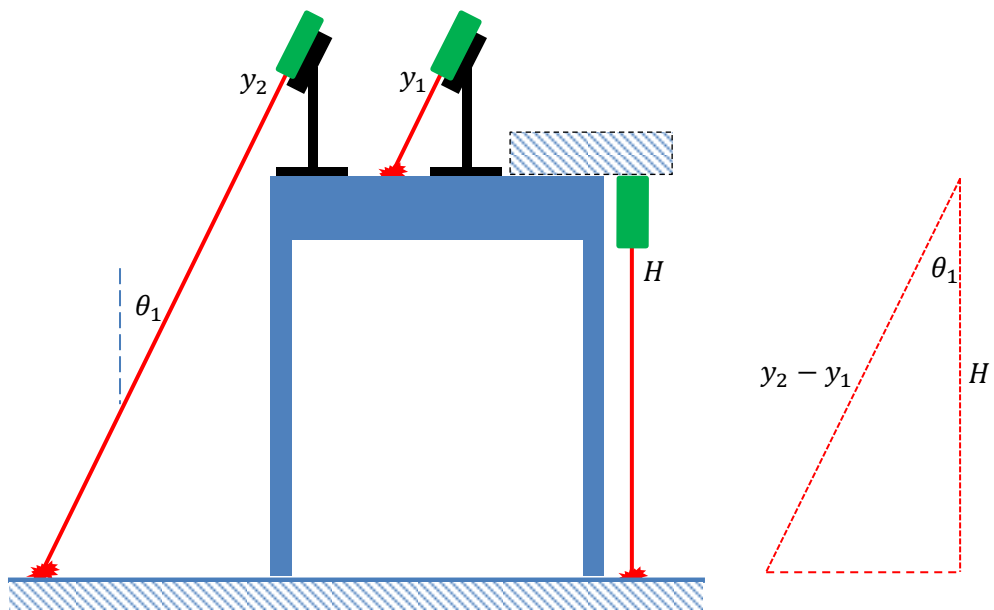

Measuring the horizontal part of some triangle is very inaccurate because of the size of the laser dot. No marks will be awarded for that

Using $\delta = 2 \text{ mm}$ as the uncertainty of y_1 , y_2 and H , one can calculate the uncertainty of θ_1

$$\Delta \cos \theta_1 = \Delta \left(\frac{H}{y_2 - y_1} \right)$$

Using simple derivative, we get

$$\begin{aligned} \sin \theta_1 \cdot \Delta \theta_1 &= \frac{\delta}{H} + \frac{2\delta}{y_2 - y_1} \\ \Delta \theta_1 &= \frac{\left(\frac{\delta}{H} + \frac{2\delta}{y_2 - y_1} \right)}{\sin \theta_1} \cdot \frac{180^\circ}{\pi} = \frac{\left(\frac{2}{907} + \frac{4}{961} \right)}{\sin 19,30^\circ} \cdot \frac{180^\circ}{\pi} = 1.1^\circ \end{aligned}$$


Otherwise, using min/max method

$$\Delta \theta_1 = \theta_{1\max} - \theta_1 = \cos^{-1}\left(\frac{H_{\min}}{y_{2\max} - y_{1\min}}\right) = \cos^{-1}\left(\frac{905 \text{ mm}}{965 \text{ mm}}\right) - \cos^{-1}\left(\frac{907 \text{ mm}}{961 \text{ mm}}\right) = 1.0^\circ$$

Also, accept $\delta = 1 \text{ mm}$ and $\Delta \theta_1 = 0.5^\circ$

1.4a

| x | y |
|----|-----|
| mm | mm |
| 4 | 450 |
| 17 | 454 |
| 27 | 457 |
| 32 | 459 |
| 39 | 461 |
| 51 | 466 |
| 58 | 467 |
| 66 | 471 |
| 76 | 473 |
| 82 | 476 |
| 90 | 478 |
| 96 | 480 |

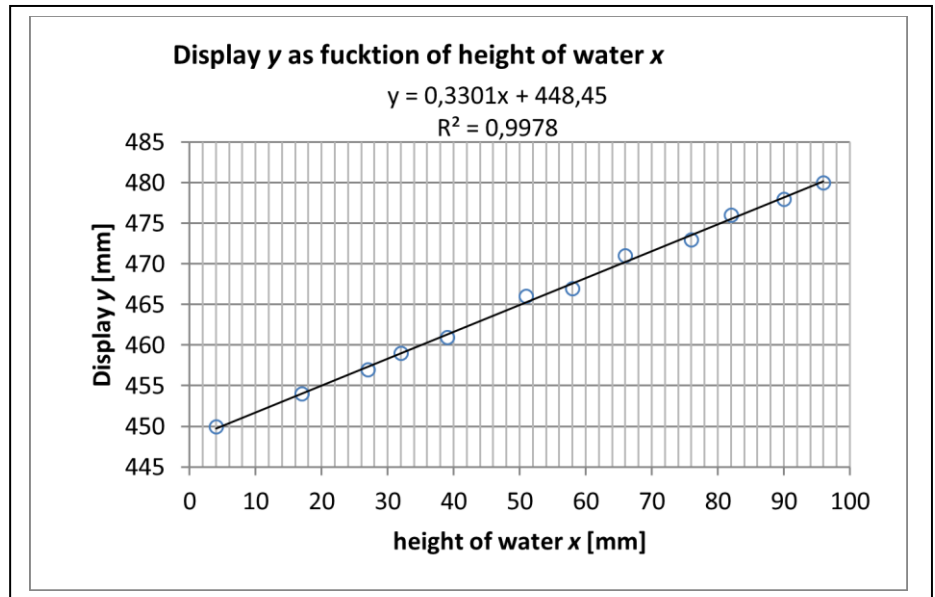

1.4b

The time it takes the light to reach the water surface is

$$t_1 = \frac{(h - x) / \cos \theta_1}{c}$$

From the water surface to the bottom the light uses the time

$$t_2 = \frac{x / \cos \theta_2}{v}$$

Total travel time forth and back

$$t = 2t_1 + 2t_2 = 2 \frac{(h - x) / \cos \theta_1}{c} + 2 \frac{x / \cos \theta_2}{v} = 2 \frac{h - x}{c \cos \theta_1} + 2 \frac{nx}{c \cos \theta_2}$$

Hence, the display will show (we simply write $n = n_w$)

$$y = \frac{1}{2}ct + k = \left(\frac{n}{\cos \theta_2} - \frac{1}{\cos \theta_1} \right) x + \frac{h}{\cos \theta_1} + k$$

which is a linear function of x .

Using a trigonometric identity and Snell's law,

$$\cos \theta_2 = \sqrt{1 - \sin^2 \theta_2} = \sqrt{1 - \frac{\sin^2 \theta_1}{n^2}}$$

we get the gradient to be

$$\alpha = \frac{n}{\sqrt{1 - \frac{\sin^2 \theta_1}{n^2}}} - \frac{1}{\cos \theta_1} = \frac{n^2}{\sqrt{n^2 - \sin^2 \theta_1}} - \frac{1}{\cos \theta_1}$$

1.4c

Knowing the gradient α from the graph, we can find n solving this equation with respect to n .

Introducing a practical parameter,

$$p = \alpha + \frac{1}{\cos \theta_1}$$

our equation becomes

$$p = \frac{n^2}{\sqrt{n^2 - \sin^2 \theta_1}}$$

which can be written

$$n^4 - p^2 n^2 + p^2 \sin^2 \theta_1 = 0$$

and solved

$$n_w = \sqrt{\frac{p^2 \pm \sqrt{p^4 - 4p^2 \sin^2 \theta_1}}{2}} = \frac{\sqrt{2}}{2} p \sqrt{1 \pm \sqrt{1 - \left(\frac{2 \sin \theta_1}{p}\right)^2}}$$

From our graph, we get $\alpha = 0.3301$. From there we find $p = 1.37865$ and hence $n_w = 1.3437$, omitting negative solutions and solutions less than 1.

The official value of n_w for pure water at normal conditions is $n_w = 1.331$ for the laser wavelength $\lambda = 635 \text{ nm}$.

Just for your interest, we have the following approximations:

For small angles, we have

$$n_w \approx \frac{\sqrt{2}}{2} p \sqrt{1 + 1 - \frac{1}{2} \left(\frac{2 \sin \theta_1}{p}\right)^2} \approx p \sqrt{1 - \left(\frac{\sin \theta_1}{p}\right)^2} \approx p \left(1 - \frac{1}{2} \left(\frac{\sin \theta_1}{p}\right)^2\right)$$

For very small angles, we get

$$n_w \approx p \approx \alpha + 1$$

It is much simpler but not recommendable to do the experiment with very small $\theta_1 \approx 0$: Reflections in the water surface will ruin the signal from the bottom.