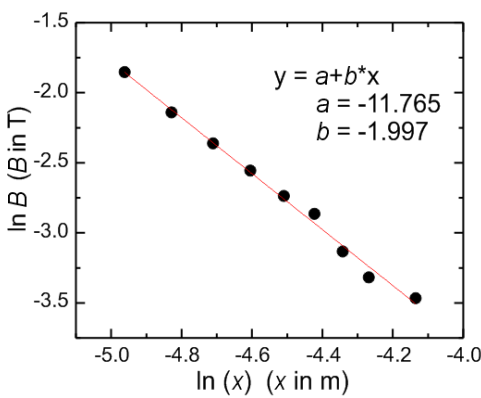


Parallel Dipole Line Magnetic Trap for Earthquake & Volcanic Sensing (10 points)

A. BASIC CHARACTERISTICS OF PDL TRAP

1. Determination of the magnet's magnetization (M) (2.5 pts)

Question	Answer	Marks																																																												
A.1 0.1 pts	Record zero offset (B_0) of the Teslameter without any magnet nearby. Subtract subsequent field measurement with this value Example from a Teslameter unit: $B_0 = 0.86 \text{ mT}$	0.08 pts range (-10 mT to 10 mT) Correct unit: 0.02 pts																																																												
A.2 1.15 pts	Measure magnetic field B vs. x in the near field region ($7 \leq x \leq 16 \text{ mm}$). <u>Where x is the position measured from the center of the magnet.</u> Record and plot your result on the answer sheet. $x_0 = 4 \text{ mm}$, $B_0=0.86 \text{ mT}$. Δx is measured from surface. $B = B_{\text{raw}} - B_0$ <table><tr><th>Δx (mm)</th><th>X (mm)</th><th>B_{raw} (T)</th><th>B (T)</th><th>$\ln(x)$ x in m</th><th>$\ln(B)$ B in T</th></tr><tr><td>3</td><td>7</td><td>0.1576</td><td>0.1567</td><td>-4.962</td><td>-1.853</td></tr><tr><td>4</td><td>8</td><td>0.1186</td><td>0.1177</td><td>-4.828</td><td>-2.139</td></tr><tr><td>5</td><td>9</td><td>0.0951</td><td>0.0942</td><td>-4.710</td><td>-2.362</td></tr><tr><td>6</td><td>10</td><td>0.0785</td><td>0.0776</td><td>-4.605</td><td>-2.556</td></tr><tr><td>7</td><td>11</td><td>0.0657</td><td>0.0648</td><td>-4.510</td><td>-2.736</td></tr><tr><td>8</td><td>12</td><td>0.0579</td><td>0.0570</td><td>-4.423</td><td>-2.864</td></tr><tr><td>9</td><td>13</td><td>0.0445</td><td>0.0436</td><td>-4.343</td><td>-3.132</td></tr><tr><td>10</td><td>14</td><td>0.0371</td><td>0.0362</td><td>-4.269</td><td>-3.318</td></tr><tr><td>12</td><td>16</td><td>0.0321</td><td>0.0312</td><td>-4.135</td><td>-3.466</td></tr></table> Plot: 	Δx (mm)	X (mm)	B_{raw} (T)	B (T)	$\ln(x)$ x in m	$\ln(B)$ B in T	3	7	0.1576	0.1567	-4.962	-1.853	4	8	0.1186	0.1177	-4.828	-2.139	5	9	0.0951	0.0942	-4.710	-2.362	6	10	0.0785	0.0776	-4.605	-2.556	7	11	0.0657	0.0648	-4.510	-2.736	8	12	0.0579	0.0570	-4.423	-2.864	9	13	0.0445	0.0436	-4.343	-3.132	10	14	0.0371	0.0362	-4.269	-3.318	12	16	0.0321	0.0312	-4.135	-3.466	Correct label and unit for data: 0.1 pts Number of correct data for $x \leq 16 \text{ mm}$: 0.05 pts for each correct data, max 0.45 pts Plot: -Correct axis label and unit: 0.05 pts - Using around 75% of plot area: 0.05 pts -For each correct data point: 0.05 pts, max. 0.4 pts -Adding trendline: 0.1 pts
Δx (mm)	X (mm)	B_{raw} (T)	B (T)	$\ln(x)$ x in m	$\ln(B)$ B in T																																																									
3	7	0.1576	0.1567	-4.962	-1.853																																																									
4	8	0.1186	0.1177	-4.828	-2.139																																																									
5	9	0.0951	0.0942	-4.710	-2.362																																																									
6	10	0.0785	0.0776	-4.605	-2.556																																																									
7	11	0.0657	0.0648	-4.510	-2.736																																																									
8	12	0.0579	0.0570	-4.423	-2.864																																																									
9	13	0.0445	0.0436	-4.343	-3.132																																																									
10	14	0.0371	0.0362	-4.269	-3.318																																																									
12	16	0.0321	0.0312	-4.135	-3.466																																																									

A.3 0.75 pts	Use your experimental data to determine the value of the exponent p. Linear regression (LR) $y = a + b x : B = \frac{\mu_0 m}{2 \pi L} \frac{1}{x^p}$ $\ln(B) = a - p \ln x$ where $a = \ln\left(\frac{\mu_0 m}{2 \pi L}\right)$. LR yields : $a = -11.765$ and $b = -1.997$ The power exponent: $p = -b = 2.0$ Note that this is in very good agreement with the exact result: at short distance ($x < L$) a diametric (or a dipole line) magnet has $B \sim 1/r^2$ dependence. See Ref. [1] , Fig. 2c.	Obtaining p from graph: 0.05 pts Obtaining p from linear regression: 0.1 pts Result: $p = 1.8 - 2.2 : 0.65$ pts $p = 1.6 - 2.4 : 0.35$ pts Result with wrong sign: $p = (-1.8) - (-2.2) : 0.4$pts $p = (-1.6) - (-2.4) : 0.1$pts More than two sig. figs.: minus 0.05 pts
A.4 0.5 pts	Determine the magnet's magnetization M. $m = \frac{2 \pi L}{\mu_0} \exp(a) = 0.987 \text{ Am}^2$ $M = \frac{m}{\pi R^2 L} = 1.2 \times 10^6 \text{ A/m}$ This is close to the more accurate results from more extensive measurements to far field (see Ref. [1], Fig. 2c) and we use this value for subsequent questions: $M = 1.1 \times 10^6 \text{ A/m}$	Correct unit: 0.05 pts Obtaining intercept (a) from graph: 0.025 pts Obtaining intercept from LR: 0.05 pts Correct formula for m and/or M : 0.1 pts Result for M ($\times 10^6 \text{ A/m}$): $0.9 - 1.4 : 0.3$ pts $0.1 - 2.5 : 0.15$ pts More than 2 sig. figs.: minus 0.05 pts

2. The Magnetic Levitation Effect and Magnetic Susceptibility (χ) (1 pts)

Question	Answer	Marks
A.5 0.1 pts	Place gently a graphite rod HB/0.5 and length = 8 mm. Measure the levitation height y_0 of the rod (see Fig. 7a). Hint: Use the insert ruler provided as shown in Fig. 7b. Press the ruler on the magnets to read the position of the graphite rod We levitate graphite HB/0.5, $l = 8 \text{ mm}$. Using the insert-ruler, we measure approximately $\Delta y = 1 \text{ mm}$ from the top of the magnet surface. Thus: $y_0 = R - \Delta y = (3.2 - 1) \text{ mm} = 2.2 \text{ mm}$	correct unit: 0.02 $y_0 = (1.7 - 2.2) \text{ mm} : 0.08$ pts partial credit: Only $\Delta y = (1 - 1.5) \text{ mm} : 0.03$ pts


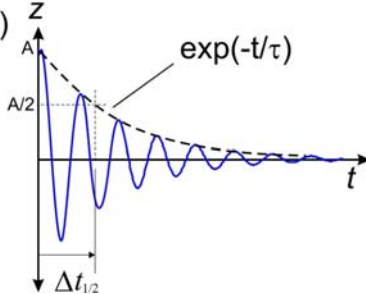
A.6 0.8 pts	Use the result from part A.5 to determine the magnetic susceptibility χ of the graphite rod. Solving for χ: $mg = F_y = -\frac{\mu_0 M^2 \chi V_R}{2} \frac{R^4}{a^5} f_Y(y_0/a)$ $\chi = -\frac{2\rho g a^5}{\mu_0 M^2 R^4 f_Y(y_0/a)}$ We calculate: $a = R + g_M / 2 = (3.2 + 1.5/2) \text{ mm} = 3.95 \text{ mm}$. Using $y_0 = 2.2 \text{ mm}$: $f_Y(u) = \frac{4u(3-u^2)(1-u^2)}{(1+u^2)^5}$, $f_Y(y_0/a) = f_Y(2.2/3.95) = 1.07$ Using the correct $M = 1.1 \times 10^6 \text{ A/m}$; and $R = 3.2 \text{ mm}$, $\rho = 1680 \text{ kg/m}^3$ we have: $\chi = -1.85 \times 10^{-4}$. Note that this is very good agreement with the literature value for graphite pencil lead: $\chi = -2 \times 10^{-4}$ (see Ref.[1], pg. 2 & Ref.[2]). The sign is negative indicating a diamagnetic material.	Correct expression for χ: 0.4 pts Result for χ ($\times 10^{-4}$) -(1.4 to 2.6) : 0.4 pts -(0.5 to 4) : 0.2 pts Wrong sign: minus 0.1 pts
A.7 0.1 pts	What kind of magnetic material is graphite? Choose one: (i) Ferromagnetic; (ii) Paramagnetic; or (iii) Diamagnetic? (iii) Diamagnetic. Because: (1) Graphite is repelled by magnetic field (2) The sign of χ is negative.	Correct choice: 0.1 pts

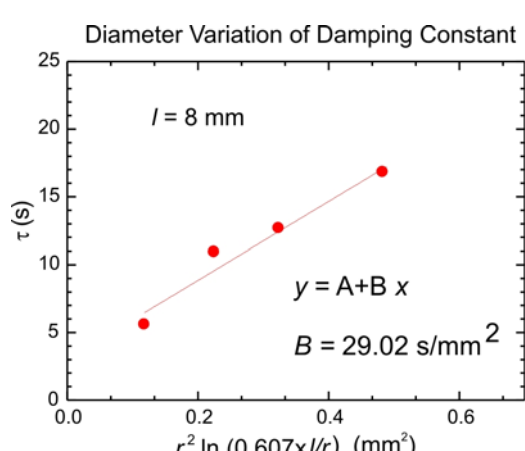
3. The camelback potential oscillation and magnetic susceptibility (χ) (1 points)

Question	Answer	Marks																		
A.8 0.2 pts	<u>Perform an oscillation for the "HB/0.5" graphite and $l=8$ mm. Limit to small oscillation amplitude i.e. $A < 4$mm.</u> <u>Determine the oscillation period. (The oscillation will decay over time due to damping, ignore this damping effect).</u> Example, we measured 5 oscillations of HB/0.5 with length $l = 8$ mm. We displaced it by ~ 3 mm and let it oscillates. We measured 5 oscillation periods: <table><tr><th>Trial</th><th>5 T_z</th><td></td><td></td><td></td><td></td></tr><tr><td></td><td>(s)</td><td></td><td></td><td></td><td></td></tr><tr><td>1</td><td>6.12</td><td></td><td></td><td></td><td></td></tr></table>	Trial	5 T_z						(s)					1	6.12					Correct label and unit: 0.02 pts Number of correct data each 0.01 pts, max 0.03 pts Number of oscillation < 3 : 0 pts >= 3 : 0.05 pts $T_z = (1.2 - 1.5)$ s: 0.1 pts
Trial	5 T_z																			
	(s)																			
1	6.12																			

	<table><tr><td>2</td><td>6.13</td><td></td><td></td><td></td><td></td></tr><tr><td>3</td><td>6.14</td><td></td><td></td><td></td><td></td></tr></table>	2	6.13					3	6.14					
2	6.13													
3	6.14													
	Average : $T_z = 1.23$ s													
A.9 0.8 pts	Calculate the magnetic susceptibility (χ) of the graphite using this oscillation For harmonic oscillator : $k_z = m_R \omega^2$, solving for χ: $\chi = -\frac{k_z}{C_1 \mu_0 M^2 V_r} = \frac{\omega^2 \rho}{C_1 \mu_0 M^2}$ Using the correct $M = 1.1 \times 10^6$ A/m. Using $C_1 = 198.6/\text{m}^2$, and $T_z = 1.23$ s, we obtain $\chi = -1.5 \times 10^{-4}$. Note that this is in good agreement with the literature value of the graphite pencil lead: $\chi = -2 \times 10^{-4}$ (Ref.[1], pg. 2); and the sign is negative indicating a diamagnetic material.	Correct expression for χ: 0.4 pts Result for χ ($\times 10^{-4}$) -(1.4 to 2.6) : 0.4 pts -(0.5 to 4) : 0.2 pts Wrong sign: minus 0.1 pts												

4. Oscillator quality factor (Q) and estimate of air viscosity μ_A (3.0 points)

Question	Answer	Marks
A.10 0.5 pts	We need to determine the damping time constant of the oscillation τ. Sketch how you measure τ in a simple way. (a)  (b)  The trick is to use "half-time" concept of exponential decay. We set the oscillation and measure the time taken for the amplitude to halve. The lifetime is: $\tau = \frac{\Delta t_{1/2}}{\ln 2}$	Correct idea: 0.3 pts Correct expression for τ: 0.2 pts
A.11 1.5 pts	Perform oscillation damping experiments with a group of rods with various diameters and fixed length of 8 mm. Determine the damping time constant τ for each rods	Correct label and unit 0.1 Number of correct data

	We displaced the graphite by ~4 mm, started the stopwatch and then waited until it decays to half. <table><tr><th>Trial</th><th>Diam.</th><th>Actual Radius</th><th>$\Delta t_{1/2}$</th><th>Mean $\Delta t_{1/2}$</th><th>τ</th><th>$r^2 \times \ln(0.607 l/r)$</th></tr><tr><td></td><td>(mm)</td><td>(mm)</td><td>(s)</td><td>(s)</td><td>(s)</td><td>(mm²)</td></tr><tr><td>1</td><td>0.3</td><td>0.19</td><td>3.89</td><td>3.913</td><td>5.646</td><td>0.117</td></tr><tr><td></td><td></td><td></td><td>3.97</td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td>3.88</td><td></td><td></td><td></td></tr><tr><td>2</td><td>0.5</td><td>0.28</td><td>7.69</td><td>7.617</td><td>10.989</td><td>0.224</td></tr><tr><td></td><td></td><td></td><td>7.57</td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td>7.59</td><td></td><td></td><td></td></tr><tr><td>3</td><td>0.7</td><td>0.35</td><td>8.77</td><td>8.82</td><td>12.73</td><td>0.322</td></tr><tr><td></td><td></td><td></td><td>8.81</td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td>8.88</td><td></td><td></td><td></td></tr><tr><td>4</td><td>0.9</td><td>0.45</td><td>12.4</td><td>11.70</td><td>16.88</td><td>0.482</td></tr><tr><td></td><td></td><td></td><td>11.33</td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td>11.38</td><td></td><td></td><td></td></tr></table>	Trial	Diam.	Actual Radius	$\Delta t_{1/2}$	Mean $\Delta t_{1/2}$	τ	$r^2 \times \ln(0.607 l/r)$		(mm)	(mm)	(s)	(s)	(s)	(mm ²)	1	0.3	0.19	3.89	3.913	5.646	0.117				3.97							3.88				2	0.5	0.28	7.69	7.617	10.989	0.224				7.57							7.59				3	0.7	0.35	8.77	8.82	12.73	0.322				8.81							8.88				4	0.9	0.45	12.4	11.70	16.88	0.482				11.33							11.38				for each diameter (4): < 3 : 0.1 pts >=3 : 0.25 pts (max 1.0 pts) Positive monotonic trend for τ vs. diameter from 0.3 to 0.9 mm with $\tau = 5$ to 20 sec : 0.4 pts
Trial	Diam.	Actual Radius	$\Delta t_{1/2}$	Mean $\Delta t_{1/2}$	τ	$r^2 \times \ln(0.607 l/r)$																																																																																														
	(mm)	(mm)	(s)	(s)	(s)	(mm ²)																																																																																														
1	0.3	0.19	3.89	3.913	5.646	0.117																																																																																														
			3.97																																																																																																	
			3.88																																																																																																	
2	0.5	0.28	7.69	7.617	10.989	0.224																																																																																														
			7.57																																																																																																	
			7.59																																																																																																	
3	0.7	0.35	8.77	8.82	12.73	0.322																																																																																														
			8.81																																																																																																	
			8.88																																																																																																	
4	0.9	0.45	12.4	11.70	16.88	0.482																																																																																														
			11.33																																																																																																	
			11.38																																																																																																	
A.12 1 pts	Determine the air viscosity μ_A Diameter Variation of Damping Constant  We have: $\tau = b r^2 \ln \left(0.607 \times \frac{l}{r} \right)$, where: $b = \frac{2}{3} \frac{\rho}{\mu_A}$. We performed linear regression $y = a + b x$, with $y = \tau$ and $x = r^2 \ln \left(0.607 \times \frac{l}{r} \right)$. We obtain: $b = 29.02 \text{ s/mm}^2$. $\mu_A = \frac{2}{3} \frac{\rho}{b} = 38.6 \cdot 10^{-6} \text{ Pa.s} \quad (1 \text{ Pa.s} = 1 \text{ kg /m s})$ Note that this is about 2.1x the actual viscosity of air of 18.2μ.Pa.s. The discrepancy is due to the ellipsoidal	Correct unit: 0.05 Obtaining result with linear regression or plot: 0.25 pts Result μ_A ($\times 10^{-6}$ Pa.s): 20 - 60 : 0.7 pts 10 - 80 : 0.4 pts 1 - 100 : 0.1 pts																																																																																																		

	approximation of the Stokes drag (vs. the actual cylindrical shape of the rod) and the proximity effect of the rod to the magnet (wall effect). Another factor is the crude nature of our manual τ determination. See Ref. [1], pg. 8.	
--	---	--

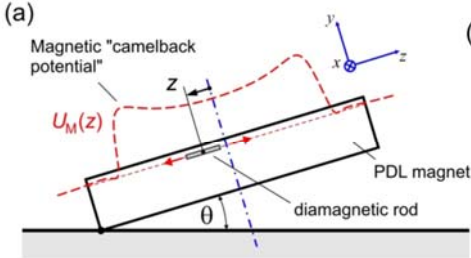

B. SENSOR APPLICATION OF THE PDL TRAP

5. PDL Trap Seismometer (0.5 pts)

Question	Answer	Marks
B.1 0.2 pts	<i>Which diameter of rod do you choose?</i> To obtain the lowest acceleration noise floor " a_n " we should choose the largest diameter graphite i.e. 0.9 mm, because their damping time is the longest and the mass is the largest.	Correct answer: 0.2 pts
B.2 0.3 pts	<i>Calculate the seismometer acceleration noise floor (a_n) for the rod of your choice!</i> For HB/0.9 and length $l = 8$ mm: We use $\tau = 16.9$ s; and $T = 298$ K, we have: $m_R = \rho \pi r^2 l = 8.55 \times 10^{-6}$ kg : $a_n = \sqrt{\frac{4k_B T \omega_0}{Q m_R}} = \sqrt{\frac{8k_B T}{\tau m_R}} = 1.5 \times 10^{-8} \text{ m}/(\text{s}^2 \text{ Hz}^{0.5})$	Correct unit: 0.1 Correct answer: 0.2 pts

6. PDL Trap Tiltmeter (2 pts)

Question	Answer	Marks
B.3 0.5 pts	<i>Derive the relation theoretically between displacement Δz with the screw thread size S and the number of turns (N).</i> $k_z \Delta z = m g \sin \theta = m g N S / D \quad \Delta z = \frac{m g S N}{k_z D}$ From Question 3, we also have $k_z = m \omega^2$: $\Delta z = \frac{g S}{\omega^2 D} N$	Correct expression: 0.5 pts Partial credit $k_z \Delta z = m g \sin \theta : 0.2$
B.4 1.25 pts	<i>By turning the screw slowly, determine the rod displacement Δz vs. the number of screw turns (N). Determine the thread size S</i>	Correct label and unit: 0.1 pts

	We measured the distance between screws: $D = 22$ cm, and we used the period from Q3: $T_z = 1.23$ s <table><tr><th>Δz (mm)</th><th>ϕ</th><th>N (turn)</th><th></th><th></th><th></th></tr><tr><td>0</td><td>0</td><td>0</td><td></td><td></td><td></td></tr><tr><td>0.5</td><td>135</td><td>0.375</td><td></td><td></td><td></td></tr><tr><td>1</td><td>270</td><td>0.75</td><td></td><td></td><td></td></tr><tr><td>1.5</td><td>450</td><td>1.25</td><td></td><td></td><td></td></tr><tr><td>2</td><td>585</td><td>1.625</td><td></td><td></td><td></td></tr><tr><td>2.5</td><td>720</td><td>2.0</td><td></td><td></td><td></td></tr><tr><td>3</td><td>855</td><td>2.375</td><td></td><td></td><td></td></tr><tr><td>3.5</td><td>945</td><td>2.625</td><td></td><td></td><td></td></tr></table> (a)  (b)  By performing linear regression: $y = a + b x$ We have $b = 1.287$ mm/turns : $S = \frac{b \omega^2 D}{g} = 0.75$ mm/turn. This is reasonably close to the actual value of the thread size: $S = (0.8 \pm 0.1)$ mm/turn.	Δz (mm)	ϕ	N (turn)				0	0	0				0.5	135	0.375				1	270	0.75				1.5	450	1.25				2	585	1.625				2.5	720	2.0				3	855	2.375				3.5	945	2.625				Distance between screws: $22.8 < D < 22.2$ cm : 0.1 pts Number of correct data: < 3 sets : 0 pts 3-5 sets: 0.15 pts >5 sets : 0.25 pts Obtaining result with linear regression or plot: 0.2 pts Result: $0.7 < S < 0.9$: 0.55 pts $0.5 < S < 1.1$: 0.15 pts Correct unit for S : 0.05
Δz (mm)	ϕ	N (turn)																																																						
0	0	0																																																						
0.5	135	0.375																																																						
1	270	0.75																																																						
1.5	450	1.25																																																						
2	585	1.625																																																						
2.5	720	2.0																																																						
3	855	2.375																																																						
3.5	945	2.625																																																						
B.5 0.25 pts	When the ground tilt changes we want the graphite rod to go to equilibrium as fast as possible (instead of sustaining very long oscillation) to allow easy reading. What is the ideal Q factor for a tiltmeter? We need critical damping thus: $Q = 0.5$	Correct Q : 0.25 pts																																																						

REFERENCES:

- [1] Gunawan, O. & Virgus, Y. *The one-dimensional camelback potential in the parallel dipole line trap: Stability conditions and finite size effect*. J. Appl. Phys. 121, 133902, (2017). DOI:10.1063/1.4978876.
- [2] Gunawan, O., Virgus, Y. & Fai Tai, K. *A parallel dipole line system*. Appl. Phys. Lett. 106, 062407, (2015). DOI: 10.1063/1.4907931.